


Φ29 二分水阀芯

TWO FUNCTIONS DIVERTER CARTRIDGE
WITH STOP FUNCTION

REF.29T2001-D 带停水



CE ACS

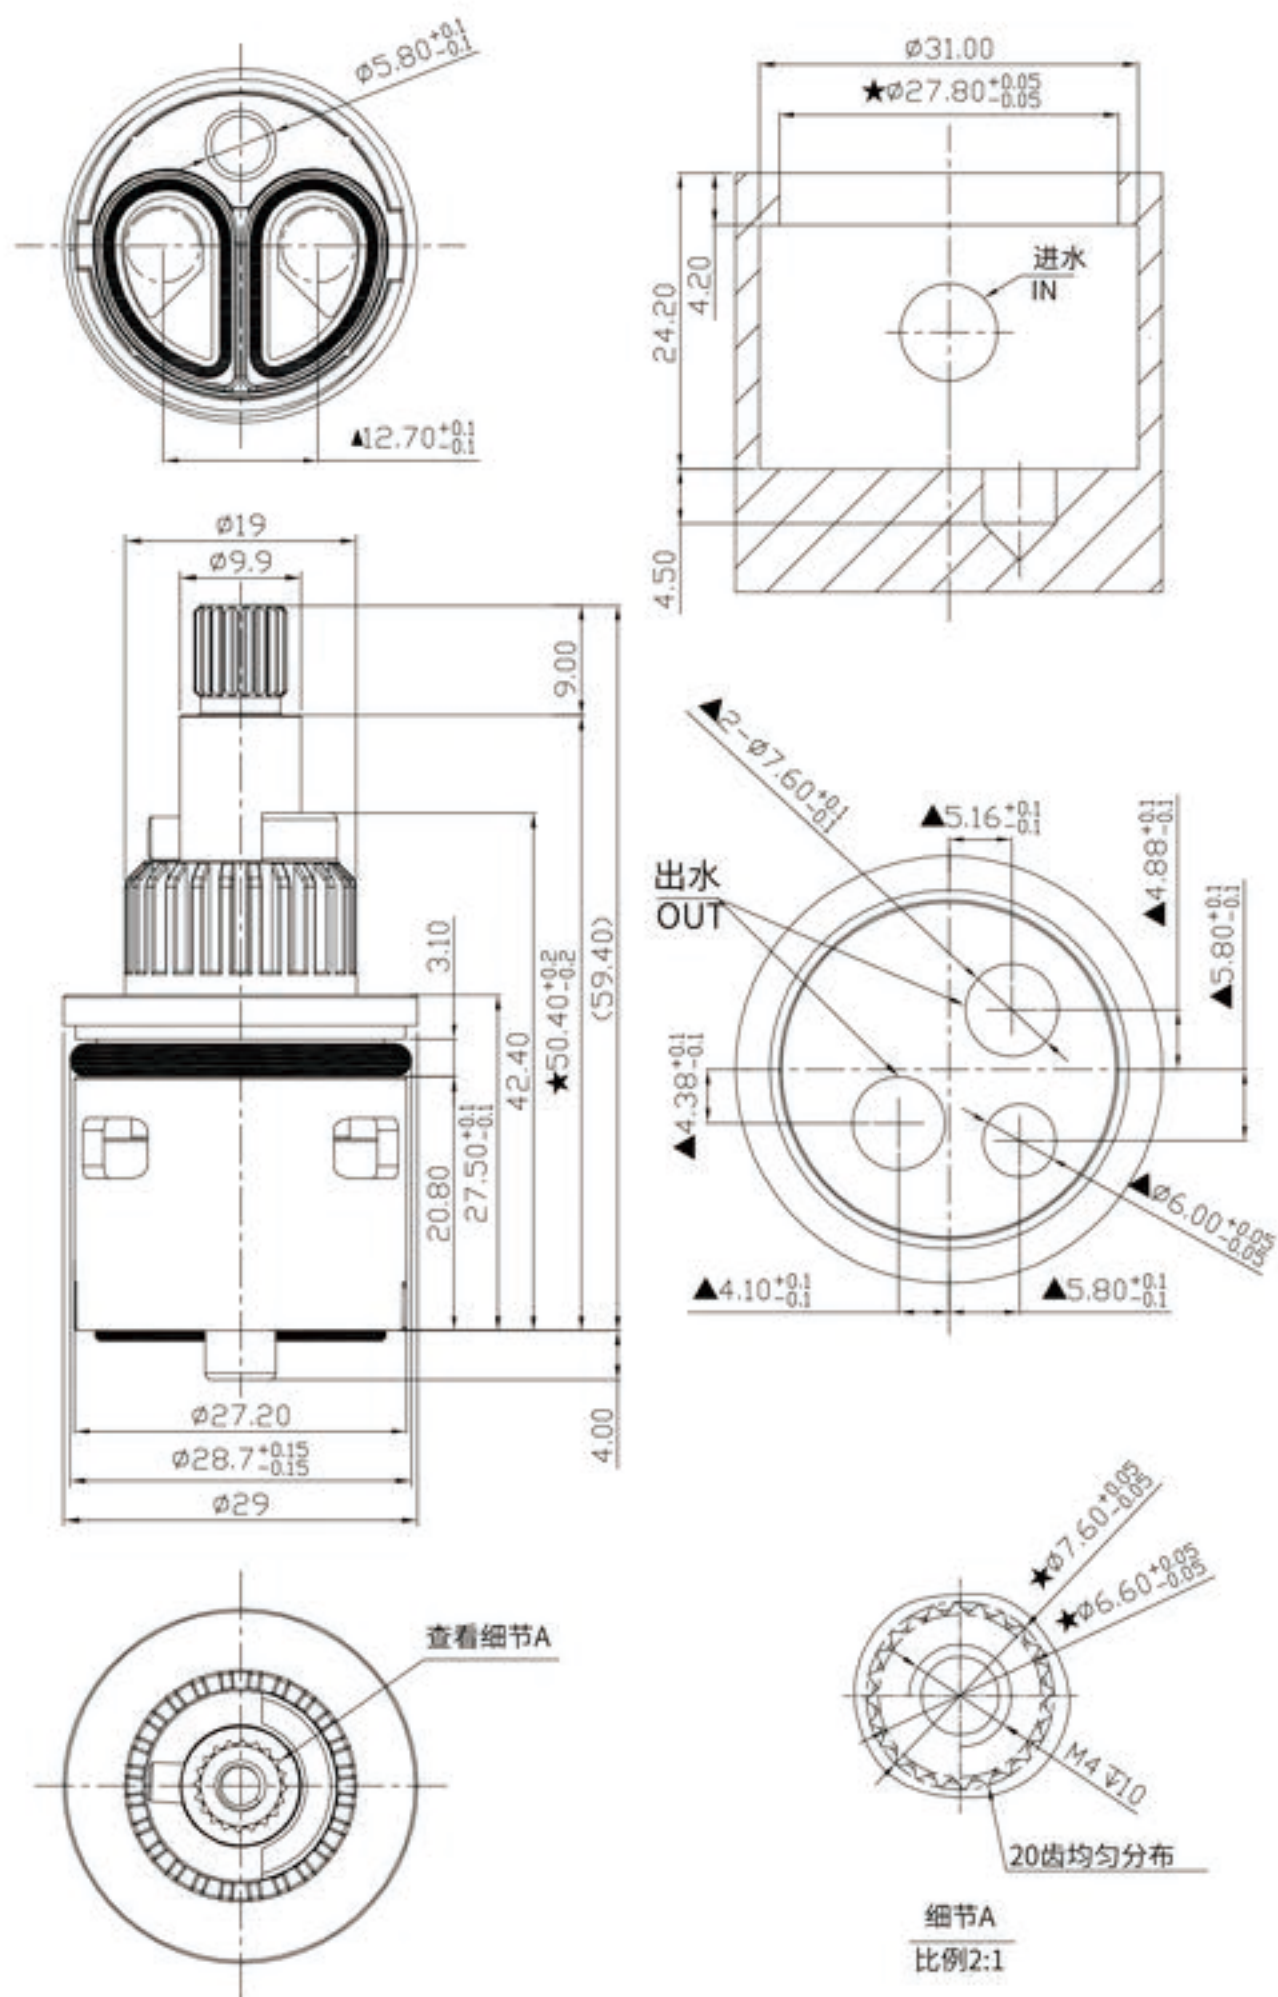

技术参数 / Technical Data

旋转角度 Turning Angle	180°	拨杆破坏扭矩 Lever Breaking Torque	≥ 6N.m
使用温度 Temperature	4~90℃	使用寿命测试 Lifetime Test	GB18145 > 70, 000 循环开关 > 70,000 open and close cycles.(GB18145)
压紧螺母扭矩 Locking Torque Force	8~10N.m	爆破测试 Bursting Test	静水压 2.5MPa, 阀芯无变形、破裂。 Static water pressure at Max2.5MPa, no deformation or breakage.

陶瓷片 / Ceramic Disc

硬度 Hardness	≥ 1100Hv5
平面度 Flatness	≤ 0.3 μm
粗糙度 Roughness	≤ Ra0.2 μm

流量测试 / Flow Rate Test

压力 (巴) Pressure (Bar)	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
流量 (升/分钟) Flow Rate(L/min)	16	21.2	25.3	28.6	30.7	33.6	36	38.1	39.9	41.8

流量分析图 / Flow Rate Chart

